

Technical data


REVOLEX® KX-D Technical data												
Size	Torque [Nm] NBR 80 ShA				Cast iron		Steel		Torsion spring stiffness C dyn. [Nm/rad]			
	Rated T _{KN}	Max. T _{K max}	Vibratory T _{KW}	T _{K max} ¹⁾	Max. speed [rpm] with v = 35 m/s	Max. bore [mm]	Max. speed [rpm] with v = 60 m/s	Max. bore [mm]	0.25 T _{KN}	0.50 T _{KN}	0.75 T _{KN}	1.00 T _{KN}
KX-D 75	4300	8600	1720	12900	–	–	4500	100	3,60x10 ⁵	5,70x10 ⁵	1,06x10 ⁶	1,58x10 ⁶
KX-D 85	5500	11000	2200	16500	–	–	4175	110	4,68x10 ⁵	7,42x10 ⁵	1,38x10 ⁶	2,06x10 ⁶
KX-D 95	7200	14400	2880	21600	–	–	3845	125	6,05x10 ⁵	9,58x10 ⁵	1,78x10 ⁶	2,65x10 ⁶
KX-D 105	9400	18800	3760	28200	2000	110	3475	130	7,88x10 ⁵	1,25x10 ⁶	2,32x10 ⁶	3,46x10 ⁶
KX-D 120	15200	30400	6080	45600	1800	125	3100	150	2,14x10 ⁶	2,97x10 ⁶	4,18x10 ⁶	5,62x10 ⁶
KX-D 135	20000	40000	8000	60000	1600	140	2725	170	2,87x10 ⁶	3,99x10 ⁶	5,61x10 ⁶	7,55x10 ⁶
KX-D 150	25000	50000	10000	75000	1450	160	2500	190	3,57x10 ⁶	4,96x10 ⁶	6,97x10 ⁶	9,38x10 ⁶
KX-D 170	41000	82000	16400	123000	1250	180	2150	220	4,63x10 ⁶	6,66x10 ⁶	9,92x10 ⁶	1,64x10 ⁷
KX-D 190	54000	108000	21600	162000	1100	205	1900	245	6,10x10 ⁶	8,78x10 ⁶	1,31x10 ⁷	2,16x10 ⁷
KX-D 215	67500	135000	27000	202500	1000	230	1725	275	7,70x10 ⁶	1,11x10 ⁷	1,65x10 ⁷	2,73x10 ⁷
KX-D 240	98000	196000	39200	294000	900	250	1550	310	8,10x10 ⁶	1,15x10 ⁷	1,57x10 ⁷	2,68x10 ⁷
KX-D 265	134000	268000	53600	402000	800	285	1375	350	1,12x10 ⁷	1,59x10 ⁷	2,17x10 ⁷	3,70x10 ⁷
KX-D 280	170000	340000	68000	510000	720	315	1225	385	1,45x10 ⁷	2,06x10 ⁷	2,82x10 ⁷	4,81x10 ⁷
KX-D 305	205000	410000	82000	615000	675	330	1150	405	1,74x10 ⁷	2,47x10 ⁷	3,37x10 ⁷	5,76x10 ⁷
KX-D 330	265000	530000	106000	795000	625	355	1075	435	2,29x10 ⁷	3,25x10 ⁷	4,43x10 ⁷	7,56x10 ⁷
KX-D 355	350000	700000	140000	1050000	575	380	975	450	4,26x10 ⁷	8,99x10 ⁷	1,37x10 ⁸	1,85x10 ⁸
KX-D 370	430000	860000	172000	1290000	535	450	900	530	4,92x10 ⁷	1,04x10 ⁸	1,59x10 ⁸	2,14x10 ⁸
KX-D 470	520000	1040000	208000	1560000	–	–	855	520	6,25x10 ⁷	1,33x10 ⁸	2,03x10 ⁸	2,74x10 ⁸
KX-D 520	810000	1620000	324000	2430000	–	–	740	According to customer specification	9,83x10 ⁷	2,08x10 ⁸	3,18x10 ⁸	4,28x10 ⁸
KX-D 590	1000000	2000000	400000	3000000	–	–	660		1,21x10 ⁸	2,56x10 ⁸	3,91x10 ⁸	5,26x10 ⁸
KX-D 650	1350000	2700000	540000	4050000	–	–	590		1,63x10 ⁸	3,47x10 ⁸	5,30x10 ⁸	7,14x10 ⁸

¹⁾ ≤ 1000 load cycles

■ = Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.


If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dyn. balancing is recommended.

Axial displacement ΔK_a

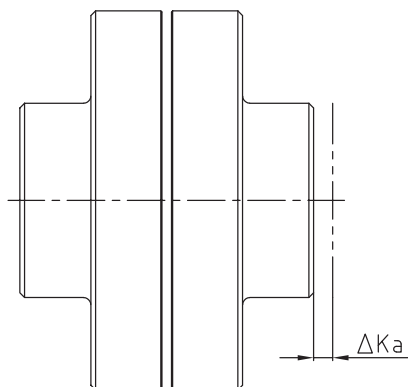


$$L_{\max./\min.} = L + \Delta K_a \text{ [mm]}$$

Radial displacement ΔK_r

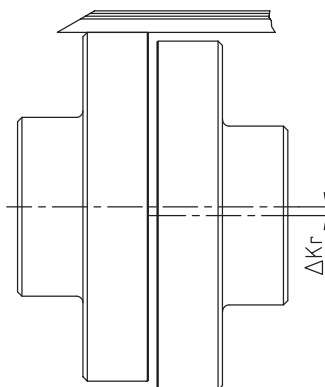

Angular displacement ΔK_w

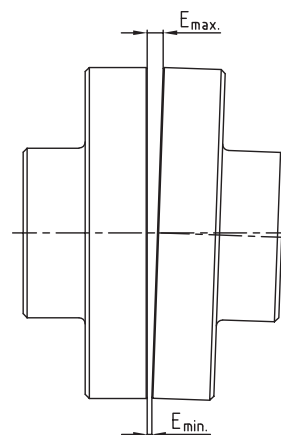

$$\Delta K_w = E_{\max.} - E_{\min.} \text{ [mm]}$$

Displacements																						
Size (KX and KX-D)		75	85	95	105	120	135	150	170	190	215	240	265	280	305	330	355	370	470	520	590	650
Max. axial displacement ΔK_a [mm]		±1.5	±1.5	±1.5	±2	±2	±2	±2	±2.5	±2.5	±2.5	±2.5	±2.5	±2.5	±2.5	±4	±4	±4	±4	±4	±4	±4
Max. radial displacement ΔK_r [mm] or max. angular displacement ΔK_w [mm] with speed n	250 rpm	0.95	1.1	1.1	1.2	1.3	1.4	1.5	1.7	1.9	2.0	2.2	2.5	2.7	2.9	3.1	3.3	3.5	3.8	4.4	4.9	5.4
	500 rpm	0.70	0.80	0.80	0.9	0.9	1.0	1.1	1.2	1.3	1.4	1.6	1.7	1.9	2.0	2.2	2.3	2.5	2.8	3.1	3.5	3.8
	750 rpm	0.60	0.65	0.65	0.7	0.8	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.6	1.7	1.8	1.9	2.0	2.2	2.4	—	—
	1000 rpm	0.50	0.55	0.55	0.6	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.2	1.4	1.4	1.5	1.7	1.8	—	—	—	—
	1500 rpm	0.40	0.45	0.45	0.5	0.5	0.6	0.6	0.7	0.8	0.8	0.9	1.0	—	—	—	—	—	—	—	—	—
	2000 rpm	0.35	0.40	0.40	0.4	0.5	0.5	0.5	0.6	0.7	—	—	—	—	—	—	—	—	—	—	—	—
	3000 rpm	0.30	0.35	0.35	0.4	0.4	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—



Advice for assembly

The permissible displacement figures of the flexible REVOLEX® KX couplings specified are general standard values taking into account the load of the coupling up to the rated torque T_{KN} of the coupling and an ambient temperature of +30 °C. The displacement figures may only be used one by one, if they appear simultaneously, they must be limited in proportion. Care should be taken to maintain the distance dimension E accurately in order to allow for axial clearance of the coupling while in operation. See KTR assembly instructions, KTR standard 49410 on our homepage www.ktr.com.



REVOLEX® KX-D

Flexible pin & bush coupling

Material cast

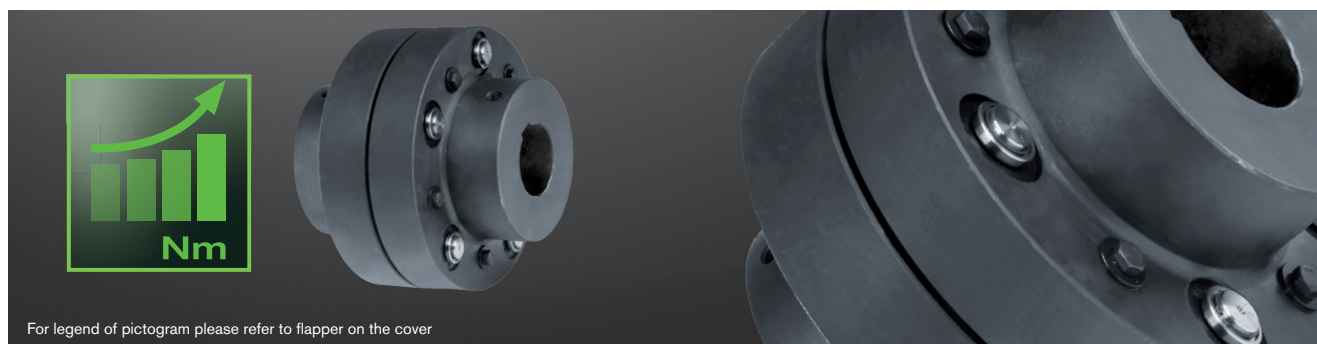

Components

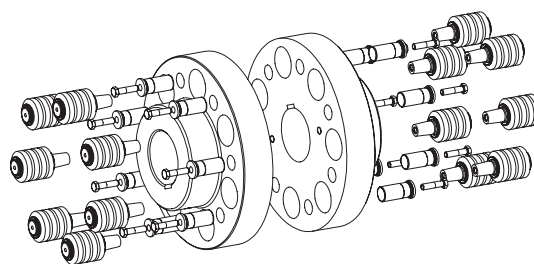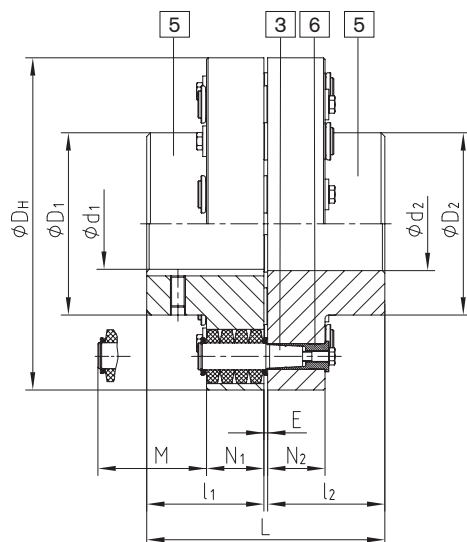

Components of type KX-D:
5 = Hub part 5
3 = Pins complete
6 = KX-D sleeve (hardened and corrosion-protected)

REVOLEX® Type KX-D													
Size	Torque ¹⁾ [Nm]		Max. speed ²⁾ [rpm]	Finish bore (min. - max.) d ₁ , d ₂	Dimensions [mm]							Mass moment of inertia ³⁾ [kgm ²]	Weight ³⁾ [kg]
	T _{KN}	T _{K max}			L	l ₁ , l ₂	E	D _H	D ₁ , D ₂	N ₁ , N ₂	M*		
KX-D 105	9400	18800	2000	38-110	237	117	3	330	180	56	76	0.907	68
KX-D 120	15200	30400	1800	45-125	270	132	6	370	206	76	100	1.867	108
KX-D 135	20000	40000	1600	75-140	300	147	6	419	230	76	100	3.144	145
KX-D 150	25000	50000	1450	85-160	336	165	6	457	256	76	100	4.573	180
KX-D 170	41000	82000	1250	95-180	382	188	6	533	292	92	130	10.259	291
KX-D 190	54000	108000	1100	110-205	428	211	6	597	330	92	130	16.601	385
KX-D 215	67500	135000	1000	125-230	480	237	6	660	368	92	130	25.495	498
KX-D 240	98000	196000	900	140-250	534	264	6	737	407	122	170	50.147	760
KX-D 265	134000	268000	800	160-285	590	292	6	826	457	122	170	80.796	997
KX-D 280	170000	340000	720	180-315	628	311	6	927	508	122	170	129.979	1301
KX-D 305	205000	410000	675	180-330	654	324	6	991	533	122	170	170.016	1509
KX-D 330	265000	530000	625	200-355	666	330	6	1067	572	122	170	227.451	1755
KX-D 355	350000	700000	575	225-380	721	356	9	1156	610	164	220	415.259	2263
KX-D 370	430000	860000	535	225-450	773	382	9	1250	720	164	220	586.686	2701

■ = Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

* Drop-out center dimension required

¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.

²⁾ Higher speeds on request.

³⁾ Referring to max. bore

Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding $v = 30$ m/s dyn. balancing is recommended.


■ = Pilot bored available from stock

Ordering example:



REVOLEX® KX-D 170	GJL	Ø120	Ø150
Type and size of coupling	Material	Finish bore	Finish bore

Flexible jaw and pin & bush couplings

ROTEX®



POLY-NORM®

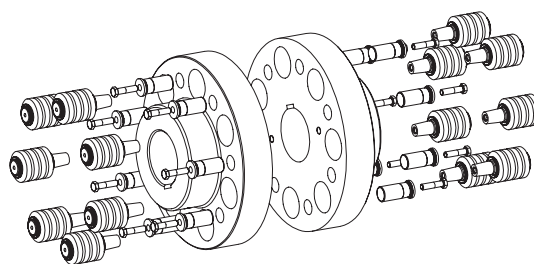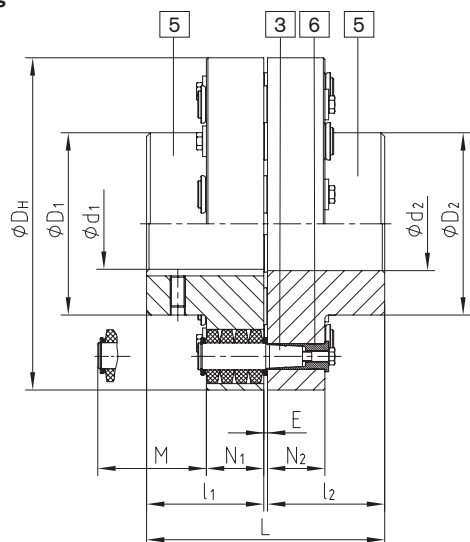

POLY

REVOLUX®


■ = Pilot bored available from stock

For continuously updated data please refer to our online catalogue at www.ktr.com

REVOLEX® KX-D SB

Flexible pin & bush coupling

With brake disk

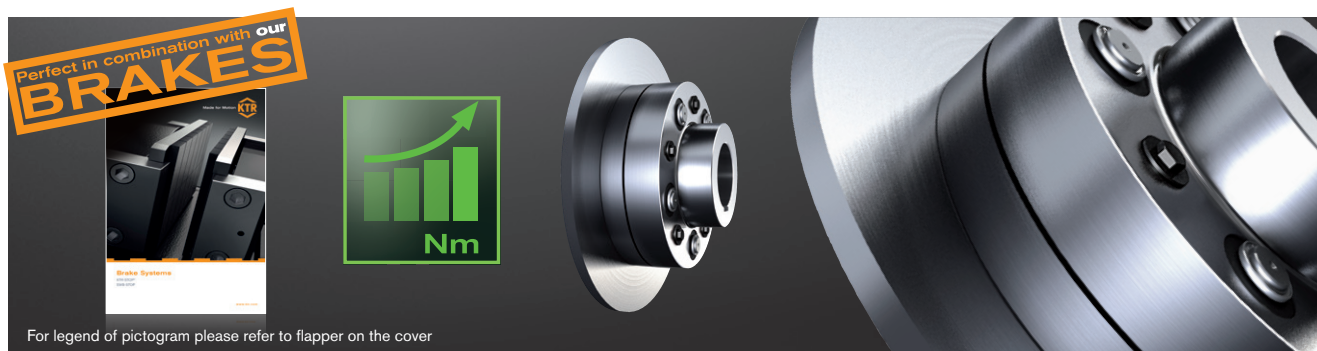

REVOLEX® KX-D Type SB

Size	Torque ¹⁾ [Nm] KX-D		Finish bore KX-D (min. - max.)		Dimensions [mm]								
	T _{KN}	T _{K max}	GJL d ₁ , d ₂	Steel d ₁ , d ₂	L	l ₁ , l ₂	E	D _H	D ₁	N ₁	N ₂	N ₃	M*
105	9400	18800	34-110	0-130	237	117	3	330	180	56	29	55	76
120	15200	30400	50-125	0-150	270	132	6	370	206	76	45	75	100
135	20000	40000	70-140	70-170	300	147	6	419	230	76	45	75	100
150	25000	50000	82-160	82-190	336	165	6	457	256	76	45	75	100
170	41000	82000	95-180	95-220	382	188	6	533	292	92	62	91	130
190	54000	108000	110-205	110-245	428	211	6	597	330	92	62	91	130
215	67500	135000	125-230	125-275	480	237	6	660	368	92	62	91	145
240	98000	196000	140-250	140-310	534	264	6	737	407	122	75	121	167

¹⁾ = Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

Selection of coupling/brake disk dimension N

Size	Brake disk ØA x b ²⁾					
	Ø560x30	Ø630x30	Ø710x30	Ø800x30	Ø900x30	Ø1000x30
	KX-D	KX-D	KX-D	KX-D	KX-D	KX-D
105	47	47				
120	42	42				
135		57	57			
150			75	75		
170			82	82		
190				105	105	
215				131	131	131
240				128	128	128

* Drop-out center dimension required

¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.

²⁾ Maximum circumferential speed v = 60 m/s referring to the maximum outside diameter.


Finish bore according to ISO fit H7, feather keyway according to DIN 6885, sheet 1 [JS9].

If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dynamic balancing is necessary (referring to outside diameter ØA).

Ordering example:

REVOLEX® KX 170	SB	Ø710 x 30	1 - Ø120	2SB - Ø150
Type and size of coupling	Type	Brake disk	Finish bore	Finish bore



Components

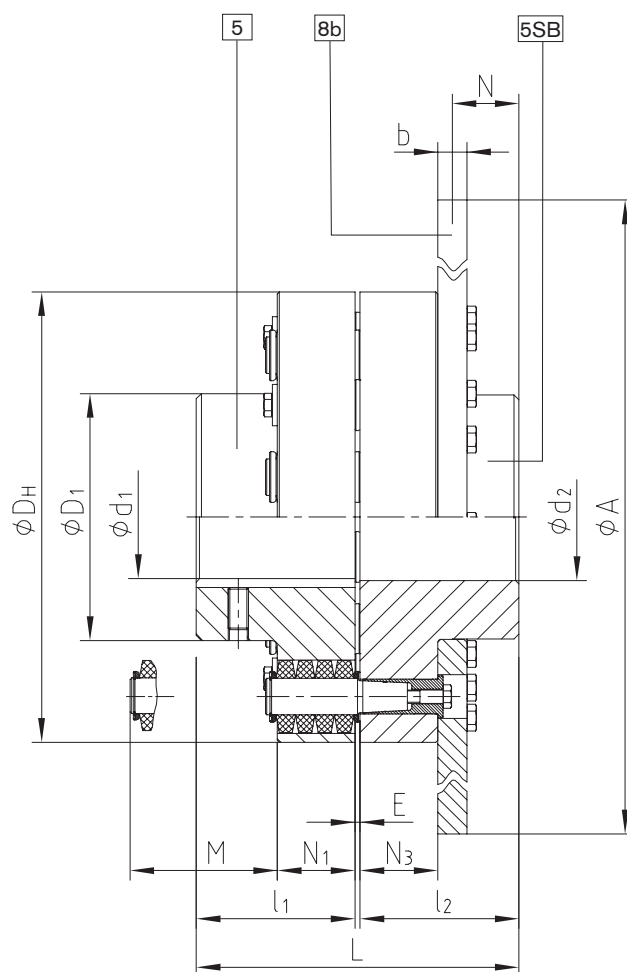

REVOLEX® KX-D with KTR 650 clamping set

Flexible pin & bush coupling

Material steel

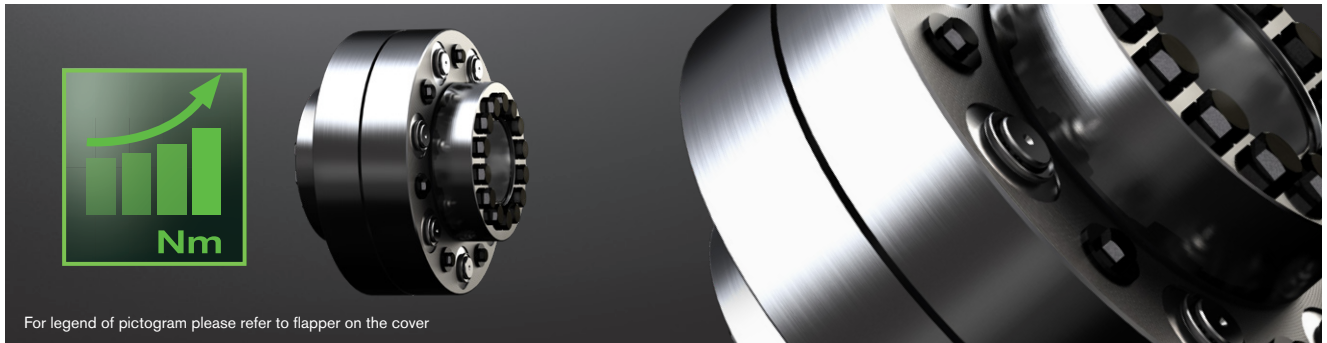

REVOLEX® KX-D						CLAMPEX® KTR 650						
Size	D _H	L1, L2	N	E	T _{KN} ¹⁾ [Nm]	Dimensions [mm]		Screws				Transmittable torque T [Nm]
						Max. perm. size d x D	T _K	Size	Length	Number	T _A [Nm]	
105	330	123	56	3	9400	100 x 197	156	M16	75	14	250	18800
120	370	149	76	6	15200	110 x 215	166	M20	90	10	490	22400
135	419	157	76	6	20000	120 x 230	186	M20	90	14	490	35200
150	457	168	76	6	25000	140 x 290	216	M20	100	16	490	46700
170	533	205	92	6	41000	180 x 340	276	M24	130	16	840	85800
190	597	214	92	6	54000	220 x 405	320	M27	140	18	1250	148600
215	660	232	92	6	67500	260 x 460	356	M27	160	21	1250	192900
240	737	254	122	6	98000	240 x 430	340	M27	150	20	1250	175400
265	826	280	122	6	134000	320 x 550	402	M27	180	24	1250	248900
280	927	313	122	6	170000	390 x 630	486	M30	200	24	1700	368300
305	991	321	122	6	205000	440 x 700	534	M30	220	28	1700	472100
330	1067	321	122	6	265000	440 x 700	534	M30	220	28	1700	472100

¹⁾ = Years of experience with applications at customer sites and additional test series in the KTR test field in Rheine enabled us to determine potentials allowing for an increase of the rated and maximum torques with some sizes of this series.

¹⁾ Standard material Perbunan [NBR] 80 Shore A, for selection see page 18 et seqq.


If requested, coupling is dynamically balanced (semi-key balancing G 6.3 with speed as specified by the customer). For circumferential speeds exceeding v = 30 m/s dynamic balancing is necessary (referring to outside diameter ØA).

CLAMPEX® KTR 650							
d x D	Dimensions [mm]		Screws				Transmittable torque T [Nm]
	B1/B2	T _K	Size	Length	Number	T _A [Nm]	
100 x 215	73	166	M20	90	10	490	22400
110 x 230	81	186	M20	90	14	490	33600
120 x 290	92	216	M20	100	16	490	42100
130 x 290	92	216	M20	100	16	490	46700
140 x 320	102	234	M24	110	14	840	63600
150 x 320	102	234	M24	110	14	840	63600
160 x 340	113	276	M24	130	16	840	85800
170 x 340	113	276	M24	130	16	840	85800
180 x 370	117	290	M27	140	16	1,250	119700
190 x 370	117	290	M27	140	16	1,250	119700
200 x 405	122	320	M27	140	18	1,250	148600
210 x 405	122	320	M27	140	18	1,250	148600
220 x 430	132	340	M27	150	20	1,250	175400
230 x 430	132	340	M27	150	20	1,250	175400
240 x 460	140	356	M27	160	21	1,250	192900
250 x 460	140	356	M27	160	21	1,250	192900
260 x 485	147	360	M27	180	21	1,250	195000
270 x 485	147	360	M27	180	21	1,250	195000
280 x 520	150	380	M27	180	21	1,250	205900
290 x 520	150	380	M27	180	21	1,250	205900
300 x 550	158	402	M27	180	24	1,250	248900
310 x 550	158	402	M27	180	24	1,250	248900
320 x 570	164	424	M27	180	24	1,250	262500
330 x 570	164	424	M27	180	24	1,250	262500
340 x 610	171	454	M30	190	24	1,700	344000
350 x 610	171	454	M30	190	24	1,700	344000

Ordering example:


REVOLUX® KX-D 170	Steel	KTR 650 Ø120	KTR 650 Ø150
Type and size of coupling	Material	KTR 650 for shaft diameter	KTR 650 for shaft diameter

Components

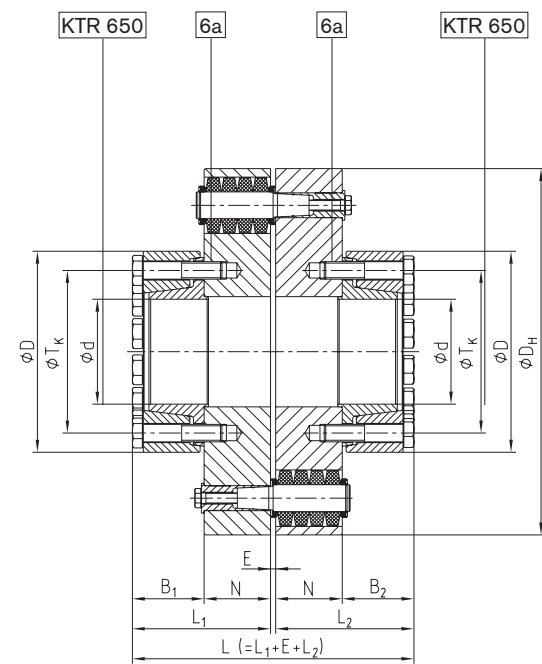


Other types


Type AB with limitation of axial backlash




Intermediate shaft type with RADEX®-N

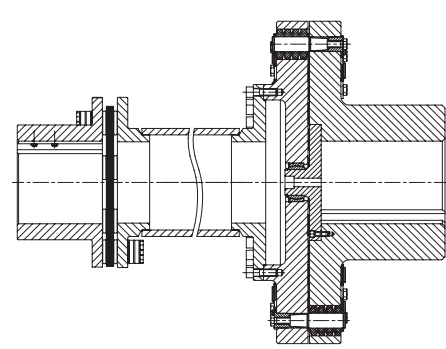


Backlash-free type

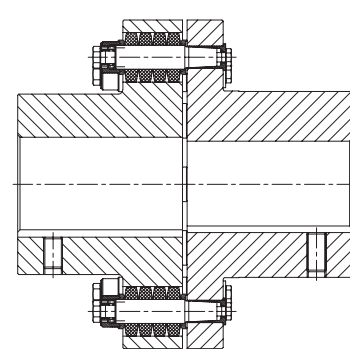


Type KX-D SD
shiftable with shiftable linkage

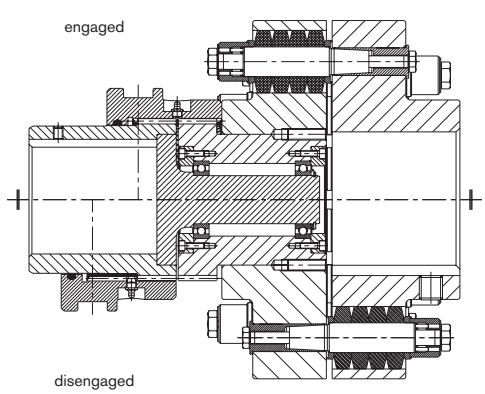

Type KX-D
with cardan shaft connection

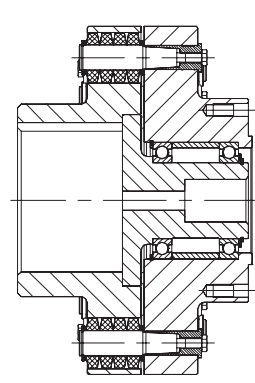


Type KX-D
with KTR-SI FRE

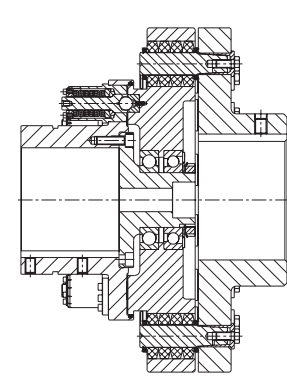


REVOLEX® KX-D

Flexible pin & bush coupling


Technical data of pins

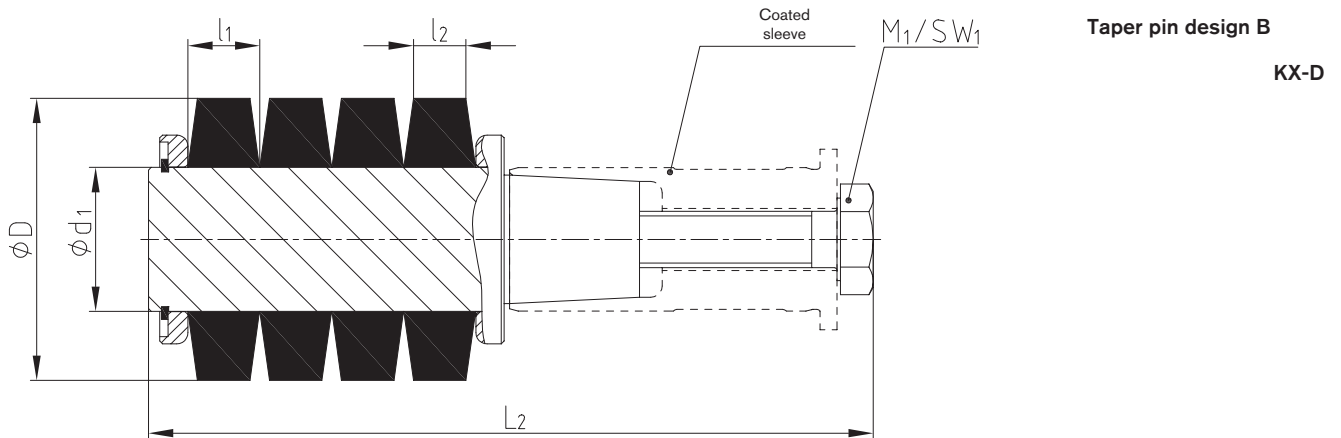


Technical data										
Size	Pin		Elastomer ring NBR 80 Shore A			Pin		Screw DIN EN ISO 4014/4017		Tightening torque T_A [Nm]
	Size	Number KX-D	D	l_1	l_2	d_1	L_2	M_1	SW_1	
75	3	10								
85		12								
95		14	50			25.5	129	M10	16	67
105		16								
120	4	14								
135		16	63			30.7	178	M12	18	115
150		18								
170	5	14								
190		16	85.5			43.2	220	M16	24	290
215		18								
240		14								
265	6	16								
280		18	113.7			58.4	290	M24	36	970
305		20								
330		24								
355	7	16								
370		20	150			75	393	M30	46	1350
470		22								
520		18								
590	8	20	200			95	523	M36	55	2250
650		24								

General information on the elastomer rings			
Material	Perbunan [NBR]	Natural rubber [NR]	Perbunan [NBR]
Hardness	80 Shore A	80 Shore A	80 Shore A
Permanent temperature range [°C]	-30 to +80	-50 to +70	-30 to +80
Max. temperature (short time) [°C]	-50 to +120	—	—
Colour	black	black	blue
Operating range	STANDARD	sub-zero temperatures	electrically insulating and backlash-free, e. g. cableway drives
			

Assembly/disassembly

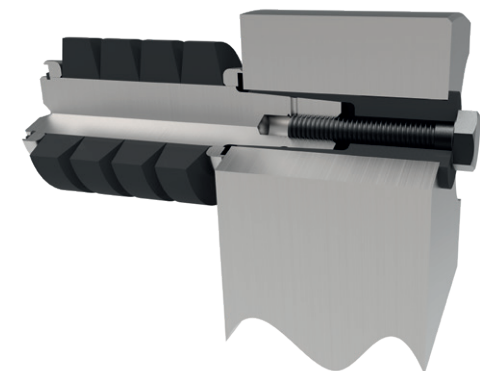


① Unscrew screw

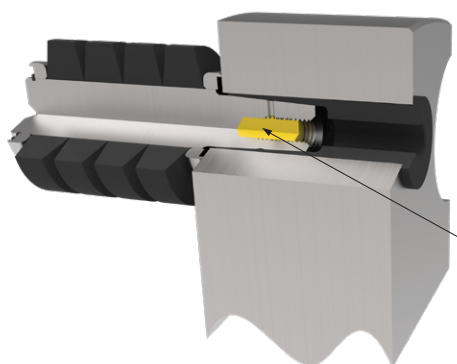


② Seal the screw in this area with sealing tape (e. g. Loctite® 55)



③ Fill the tapped hole with standard grease for 3/4

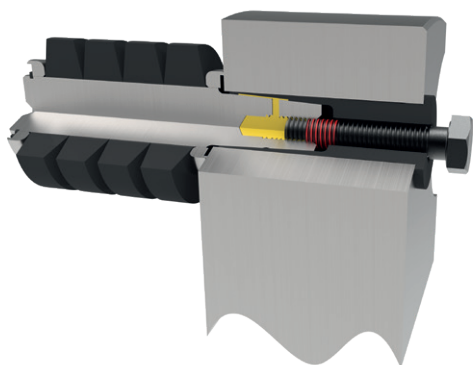

④ Screw in the screw (no special tools required)

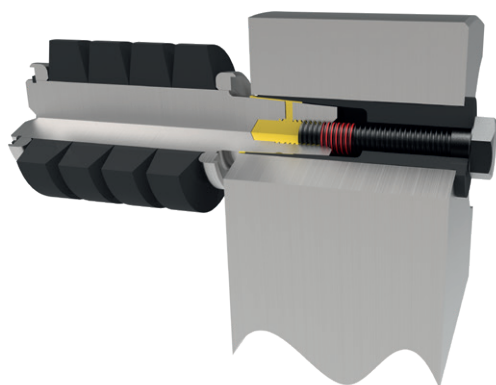

⑤ The hydraulic pressure is transmitted to the pin pressing it out of the taper fit.